




Chain Hoist Elephant HOISTMAN

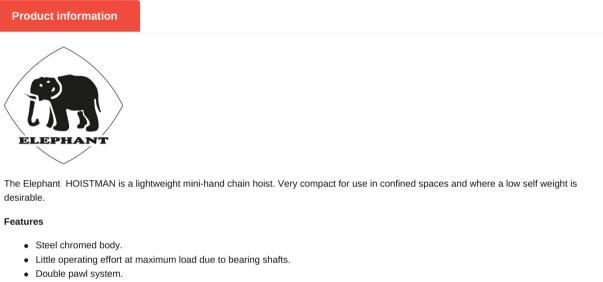

- Self-locking brake that holds the load at any desired height.
- Top and bottom hook have safety latches.
- In case of overload, the hooks will gradually bend and do not suddenly break off.
- Galvanized load chain (Grade 10).
- Galvanized hand chain

Standard delivery

- 2,5 meters lifting height (maximum distance between top and bottom hook).
- 2 meters operating height.

Marking: According to standard, CE-marked Standard: EN 13157, EN 818-7

Part code GTIN No. WLLLif	ting height Number of falls	Model Load cha	in Hand chain	Construction heigh	t Hand force max.	A mmB mmC mr	n D E F G H I V	Veight Delivery time
ton	m	mm	mm	mm	kg		mmmmmmmmmmm	kg
0100000 8717365000676 0.15	2.5 1 1	HOISTMAN-150KG 3.1 X 9.3	2.5 X 14	220	17	220 103 46	57 102 14 24 11 9	2.8 3
0100002 8717365115196 0.25	2.5 1 1	HOISTMAN-250KG 3.1 X 9.3	2.5 X 14	220	20	220 103 46	57 102 14 24 11 9	2.8 3

Blueprint

