


## EFS elektric trolley for SR hoist

---

### Product information

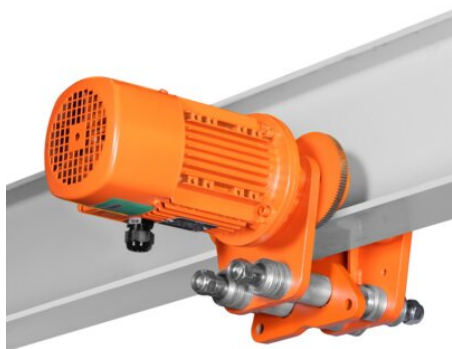

### Properties

- Double axle design.
- 1 or 2 travel speeds.
- Wheel rupture supports and anti-surge devices.
- Supporting rollers not included.
- Assembly and suspension plates not included.

### Technical properties

- Operating voltage: 400V
- Protection class: IP55
- isolation class: F

... [Read more](#)

---


**Marking:** According to standard, CE-marked

**Standard:** EN 12100, EN 13157, EN 1492-2

**Note:** Always mention the right flange width in mm.

## EFS elektric trolley for SR hoist

### Blueprint



### Technical data

Part code	GTIN No.	WLL ton	Beam width	Model	Motor kW	Trolley speed m/min	Minimum radius mm	D, mm	F mm	K mm	L1mm mm	Mmm mm	Nmm mm	Omm mm	Weight kg
0817001	8717365002274	0.5	50-300	EFS500-16	0.12	16	1,000	70	50-300	33	216	112	230	142	17
0818001	8717365002304	0.5	50-300	EFS500-5/20	0.04/0.18	5/20	1,000	70	50-300	33	216	112	292	280	19
0817005	8717365002298	2	66-300	EFS2000-16	0.12	16	1,500	70	66-300	38	216	112	220	146	17
0818005	8717365002328	2	66-300	EFS2000-5/20	0.04/0.18	5/20	1,500	70	66-300	35	216	112	292	280	18
0818007	8717365002335	3.2	82-300	EFS3200-5/20	0.04/0.18	5/20	1,500	103	82-300	38	293.5	152.5	385	280	34
0818009	8717365002342	6.3	90-310	EFS6300-4/16	0.06/0.25	4/16	2,000	122	90-310	38	293.5	152.5	409	280	63
0818011	8717365022579	12.5	140-310	EFS12500-4/16	0.12/0.55	4/16	2,500	150	140-310	38	351	191	409	280	150