
REMA 75 YEARS HOISTING & LIFTING Work made easy.

Load binders

Product information

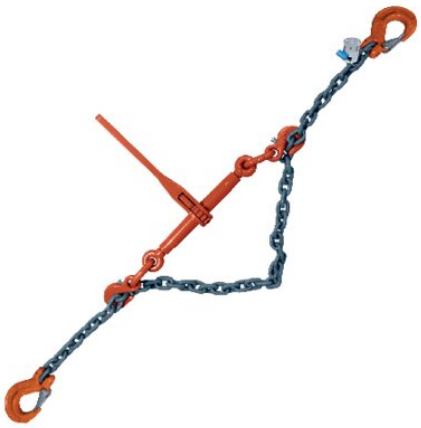

Load binders are used for the safe securing of heavy loads by road, rail, air and ship transport. The lashing chains are equipped with a ratchet tensioner, load hooks with safety latches, shortening claw with a safety device that prevents the chain from vibrating during transport. The ratchet tensioner applies a force to the chains in a controlled manner.

Properties

- Ratchet tensioner with secure-locking.
- Long side can be shortened safely by the shortening claw.
- Safety label with workload and tension force.
- Chains and accessories Grade 10, tensioner Grade 8
- Standard working length 3.5 m.
- Length of cranck 355 mm.

IMPORTANT:

- Every load, independent of its weight, must be secured.
- Load binderss are not suitable for lifting a load.
- Never extend the handle with a pipe for more force.
- Never subject chains, hooks and tensioner over sharp edges.
- Use corner protectors or guides on sharp edges (r radius <diameter chain).
- lashing chain with stretched or bent links, cracks, etc. may no longer be used.
- In case of doubt, always have it inspected and / or repaired by authorized persons or authorities.

... *Read more*

Marking: According to standard
Standard: EN 12195-3

REMA Hoisting & Lifting
info@rema.eu
+31433631777

© November 2026 - All Rights Reserved

REMA® 75 YEARS HOISTING & LIFTING Work made easy.

Load binders

Technical data

Part code	Diameter mm	LC daN	Length m	Model	STF daN	Weight kg	Code
3025108	8	5,000	3.5	TLB-8mm-3,5m	1,900	12	8717365175886
3025110	10	8,000	3.5	TLB-10mm-3,5m	1,900	19	8717365175893
3025113	13	13,400	3.5	TLB-13mm-3,5m	2,500	33	8717365175909

REMA Hoisting & Lifting
info@rema.eu
+31433631777
© November 2026 - All Rights Reserved